


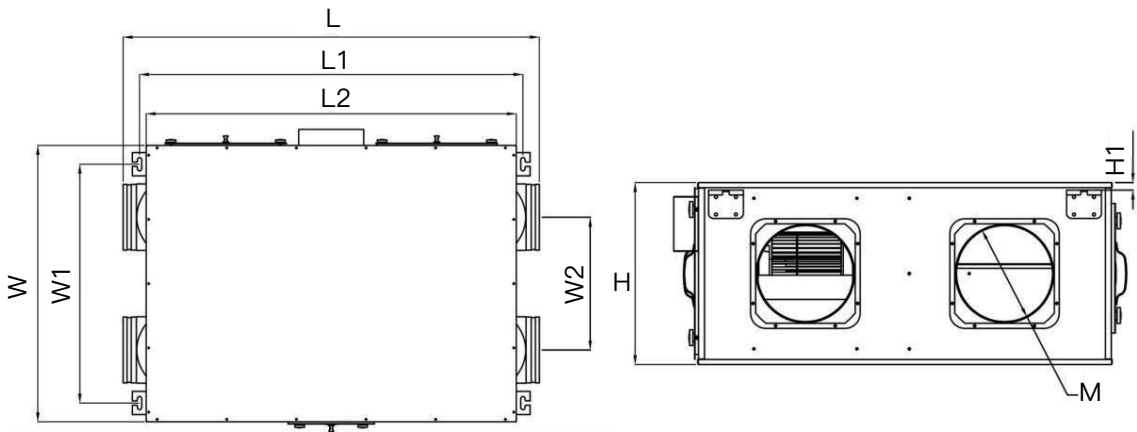
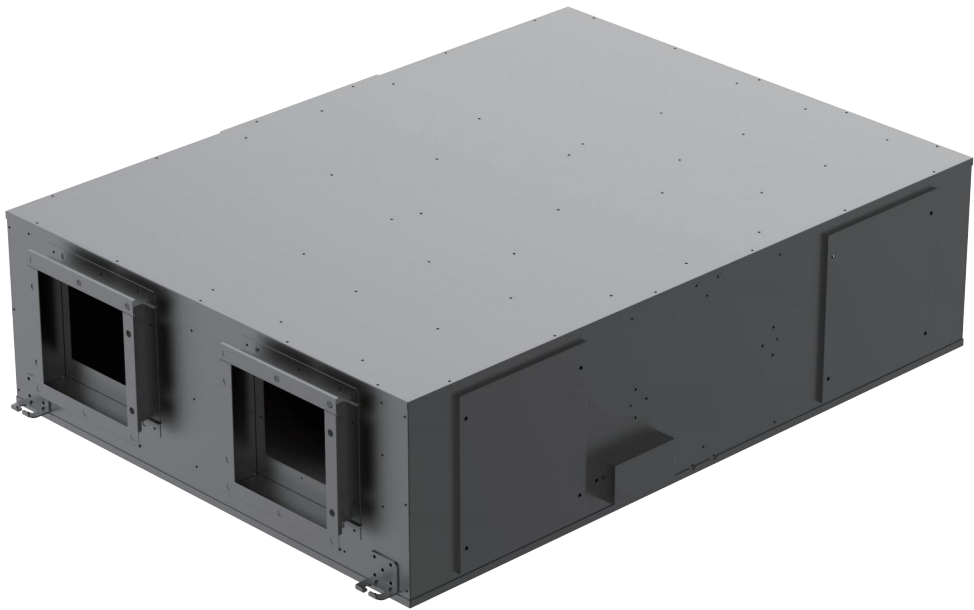








COMMERCIAL HEAT RECOVERY UNIT



Model	L	L1	L2	W	W1	W2	H	H1	M
KCQR-1000	1255	1156	1116	832	719	400	365	15	200
KCQR-1500	1255	1156	1116	832	719	400	365	15	250
KCQR-2000	1299	1200	1160	832	734	400	380	15	250
KCQR-2500	1478	1379	1338	975	877	485	421	15	250



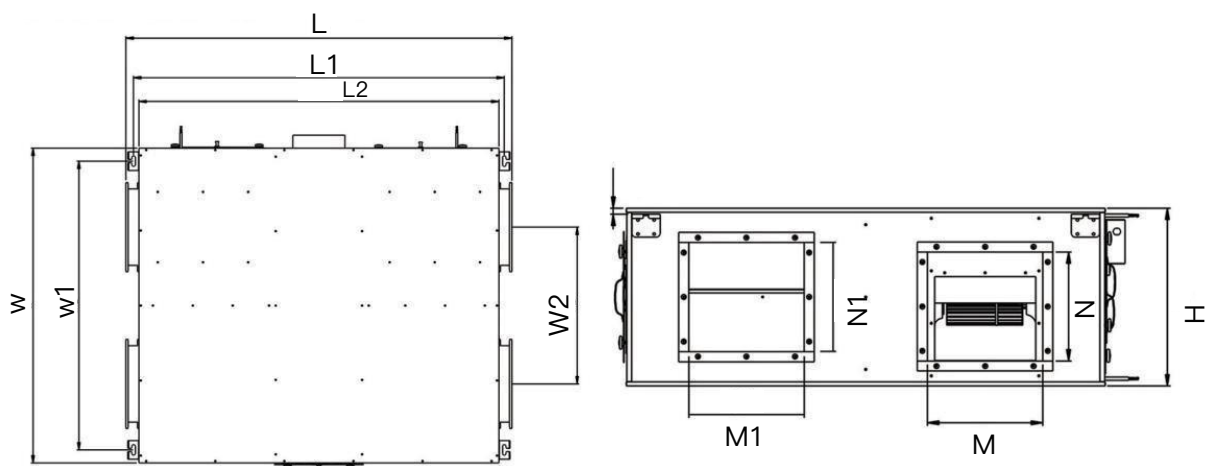

Model	L	L1	L2	W	W1	W2	H	H1	MxN	M1xN1
KCQR-3000	1452	1395	1355	1185	1087	590	440	15	285x270	380x262
KCQR-4000	1452	1395	1355	1185	1087	590	440	15	285x270	380x262
KCQR-5000	2009	1845	1912	1201	1261	536	650	50	350x410	350x410
KCQR-6000	2009	1845	1912	1201	1261	36	650	50	350x410	350x410
KCQR-8000	2009	1845	1912	1201	1261	536	650	50	350x410	350x410

Model	Voltage (V-Hz)	Speed	Power (W)	Airflow (m³/h)	Static Pressure (Pa)	Noise (dB)	Exchange Efficiency		Enthalpy Exchange Rate		N.W (Kg)
							Cooling	Heating	Cooling	Heating	
KCQR-1000	220-50	H/L	600/500	1000/800	245/210	48/46	62/64	58/71	61/65	60/66	66.5
KCQR-1500	220-50	H/L	1100/900	1500/1200	265/230	52/50	63/68	60/72	62/68	60/70	67
KCQR-2000	220-50	H/L	1400/1200	2000/1700	270/245	55/53	64/69	61/73	63/68	60/71	83
KCQR-2500	220-50	/	1600/1400	500/2200	285/255	56/53	64/69	63/76	63/68	60/72	85
KCQR-3000	220/380-50	/	1900	3000	275	57	69	79	68	68	106.5
KCQR-4000	220/380-50	/	2200	4000	305	58	69	79	68	71	107.5
KCQR-5000	380-50	/	3000	5000	320	60	69	79	68	71	164
KCQR-6000	380-50	/	3300	6000	345	62	69	73	68	71	195
KCQR-8000	380-50	/	4400	8000	370	65	70	76	69	72	284