


EXPLOSION-PROOF FAN-CBF(BAF\BZF51)SERIES

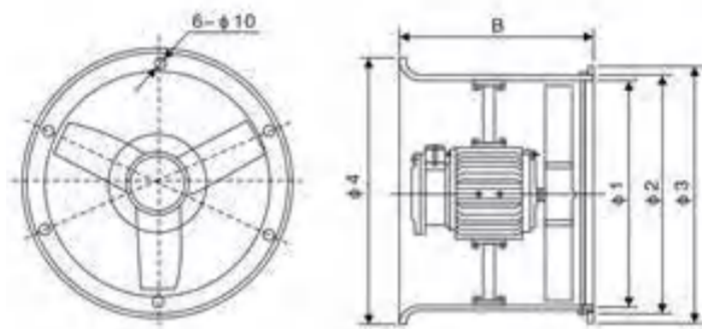

Model	B	Φ1	Φ2	Φ3	Φ4
CBF-300	330	305	327	350	360
CBF-400	330	405	428	455	465
CBF-500	330	505	530	555	565
CBF-600	330	605	630	655	665
CBF-700	450	710	738	766	766
CBF-750	450	755	778	808	808

Model	Size (mm)	Power (KW)	Speed (r/min)	Airflow (m³/h)	Cable Outer Diameter Thread (mm/G")	Inlet Pipe Thread	Rated Voltage (V)
CBF-300	300	0.18	1450	2280	Φ10~Φ14	G3/4"	Three-Phase380 Single-Phase220
CBF-400	400	0.37	1450	2880			
CBF-500	500	0.55	1450	5700			
CBF-600	600	0.75	1450	8700			
CBF-700	700	1.1	1450	10200			hree-Phase380
CBF-750	750	1.5	1450	15300			